





The Universal Relay Control Box facilitates the management of multiple heaters by establishing diverse heat zones within a designated area through the use of 0-120V solid state relays, offering the user the option to incorporate dimming capabilities to the heaters.

1 AND 2 ZONE

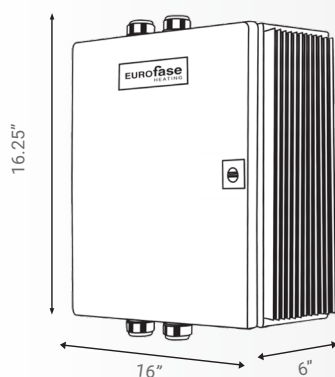

H: 16.25" W: 16" D: 6"
* Heatsink dimensions 13" X 2"

3 AND 4 ZONE

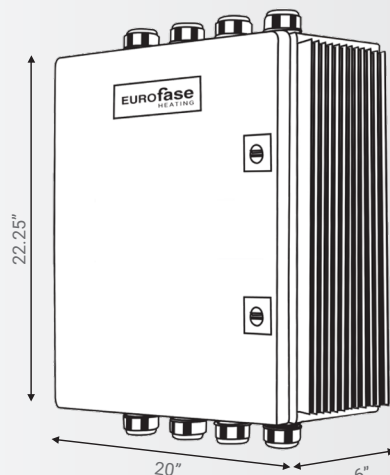

H: 22.25" W: 20" D: 6"
* Heatsink dimensions 18" X 2"

SPECIFICATION GUIDE

DESCRIPTION	CODE	VOLTAGE	CODE	ZONES	CODE
Universal relay Control Box (TRIAC Dimming Compatible)	EFURCBT	120V-240V	24	1 ZONE	M1
				2 ZONE	M2
				3 ZONE	M3
				4 ZONE	M4

• For custom manufacturing contact sales

Tel: 1-833-346-6682

eurofaseheating.com | eurofase.com

Project

Type

Date

Address

Company



FEATURES

- TRIAC Dimming: 0-100% smooth dimming control
- Multi-Zone Capability
- Connect Directly to Line Voltage Switches
- Smart Home Compatible: integrates with any smart home management system
- Safe & Reliable: Built With High -quality Components for Long- Lasting Performance
- NEMA 4 Enclosure
- 50A Zone Capacity per Relay

SPECIFICATIONS

SERIES	EFURCBT			
COLOR	Light Grey			
INPUT VOLTAGE	120V, 208V, 240V			
ZONE CAPACITY	50A per zone			
MAX. AMPERAGE	1 Zone 50A	2 Zone 100A	3 Zone 150A	4 Zone 200A
CONTROL VOLTAGE	0V-120VAC			
MOUNTING TYPE	Wall mount			
1 AND 2 ZONE	16.25"L x 16"W x 6"D			
3 AND 4 ZONE	22.25"L x 20"W x 6"D			
ENCLOSURE RATING	NEMA 4			
WARRANTY	3 years			
COUNTRY OF ORIGIN	Canada			

ORDERING GUIDE EXAMPLE:

Universal relay Control Box (TRIAC Dimming Compatible) + 240V
+2 Zone = EFURCBT + 24 + M2 = EFURCBT24M2